




SAFE Systems, Inc.

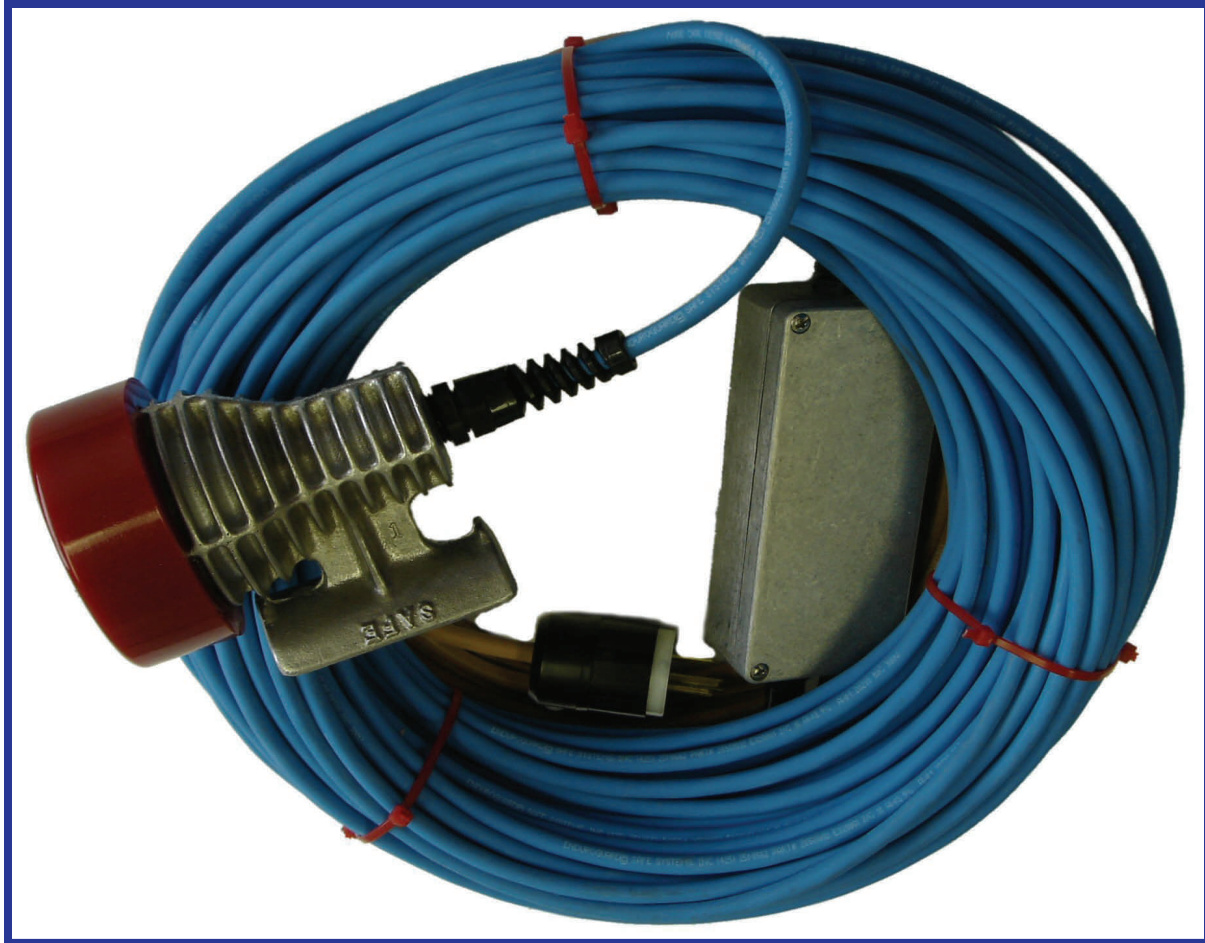

LED BLAST LIGHT SYSTEM

Low Voltage Electric Blast Light

50,000 Hour Rated LED

Durable Aluminum Construction

Integral Heat Sink to Protect the LED Module

Constant Current Power Supply in NEMA 4 box

Double Band Hose Connection

Molded Urethane Bumper Available

User replaceable parts include Lens and Bumper

Ultra White Light Output

150' 18-2 Enduroguard Cable

Low Profile

¼" thick Pyrex Glass Lens

Sturdy Strain Reliefs

3-prong Plug

10' 16-3 Enduroguard pigtail

Plugs into 120 VAC wall outlet

Optional configurations available with multiple LED modules

Choice of reflectors and optics to change the pattern of light

18420 68th Ave S. Suite 202 Kent, WA 98032

Phone: (425) 251-8662

Fax: (425) 251-8683

www.safesys.com

info@safesys.com



LED BLAST LIGHT SYSTEM

Proven to have higher output and whiter light than the competitors.

Part #	Description	Price
6921 8150	LED Blast Light, White, 150' cable, 700mAh constant current power supply and 3-prong plug	\$575.00
3400 1250	Pyrex Lens, for LED or Halogen Blast Lights	\$5.75
6912 5050	Molded Urethane Bumper, available in Green, Red, Blue, Orange or Yellow for color coding the blast lines	\$25.00
2650 1802	Enduroguard® Cable, 18-2	\$0.95/ft
2650 1603	Enduroguard® Cable, 16-3	\$1.45/ft
2709 1075	Plug, 3-prong	\$12.25
4300 7400	Snap Ring "A", Outer	\$1.50
4300 7410	Snap Ring "B", Inner	\$1.50
6204 5065	Lens Cap, Snap Ring Style	\$13.50
4200 1500	Screw, Lens Cap	\$0.16
6911 0006	3/8" Strain Relief, on constant current side, 18-2 cable	\$2.75
2709 1038	3/8" Strain Relief, on 120V power, 16-3 cable	\$4.00

18420 68th Ave S. Suite 202 Kent, WA 98032
Phone: (425) 251-8662 Fax: (425) 251-8683
www.safesys.com info@safesys.com